

regal Fono Mini Phono Amplifier

The **Fono Mini** was designed to amplify the signal from a moving magnet cartridge up to a level that will be suitable for all line level inputs of an amplifier such as Aux, Tape and Tuner (not suitable for connection to 'Phono' or 'Disk' input).

The **Fono Mini** phono amplifier offers exceptional performance for its price as it uses the best quality components some of which are usually found in Hi Fi products over twice the price.

We hope you agree that this great little product offers outstanding value for money and will be a valuable addition to your Hi Fi set up.

Fono Mini Connections

Input: Please connect the signal lead (tonearm leads) to the input sockets labelled on the front panel.

If the tonearm requires a separate earth please connect the earth lead to the earth terminal found on the back panel of the **Fono Mini**.

Output: Please connect the output sockets (labelled on the front panel) of the **Fono Mini**, to a suitable input on the amplifier as listed above using appropriate RCA leads. The Fono Mini can also be plugged into the 'line in' socket on a Personal Computer. This will allow conversion of records from analogue to digital, using suitable software on your PC.

Power: Please connect the designated power supply to the power socket situated on the front panel of the **Fono Mini**.

Set up is now complete, simply switch on, sit back and enjoy!

Fono Mini Specifications

Input sensitivity: 2mV for 200mV Output
Input loading: 47K ohm in parallel with 100pF

Maximum input level: 65mV @ 1kHz


Minimum output load impedance: 10K Ohm

Power requirements: 24VAC @ 27.5mA


RIAA accuracy (50K Ohm load): +/-0.5dB 40Hz to 100kHz

Frequency response for 50 K Ohm load: 15Hz(-3dB) to 100kHz (-0.5dB)

Fono Mini Phono Amplifier

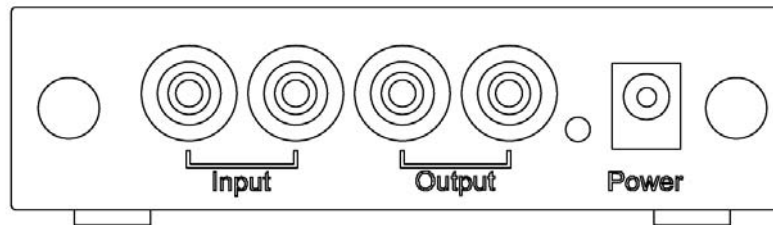

Fono Mini Front Panel showing 'input', 'Output' & 'Power' connections

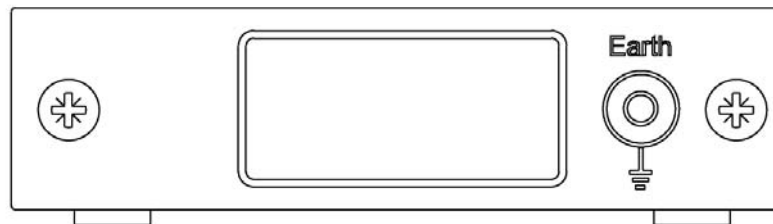

Fono Mini Back Panel showing 'Earth' connection.

Power Supply Variations

UK

Model No. T35A-24-100-3

Input: 230V~50Hz 0.025A

Output: 24V ~ 100mA AC

Eu (Euro 2 pin)

Model No. T35A-24-100-3

Input: 230V~50Hz 0.025A

Output: 24V ~ 100mA AC

UL (American)

Model No. 35A-24-100

Input: 115V~60Hz 5W

Output: 24V ~ 100mA AC

Aus/Nz

Model No. A35A-24-100

Input: 240Vac~50Hz 30mA

Output: 24V ~ 100mA AC

!WARNING!

Only use the mains adaptor supplied to operate this product.

regal

Rega Research Ltd., England
www.rega.co.uk

